


DATA SHEET

Switchover Box - Fronius SYMO GEN24 Plus - „Full Backup“

3PH_FRO_BBDAP_20KW_3PH_FRT

Art.Nr. 10017349

Designation	Switchover Box for Fronius SYMO GEN24 Plus - All-pole - Standard incl. FRT
Application	Fronius SYMO GEN24 Plus System „Full Backup“
Region	Austria
Battery inverter	Symo GEN24 6.0 Plus/8.0 Plus/10.0 Plus
Monitoring & Control	Fronius Smart Meter TS65A-3 - „Touchscreen“ is integrated
Grid structure	3PH 230/400V - TN-S system (TT system in consultation with grid operator!), NO TN-C in customer's system!

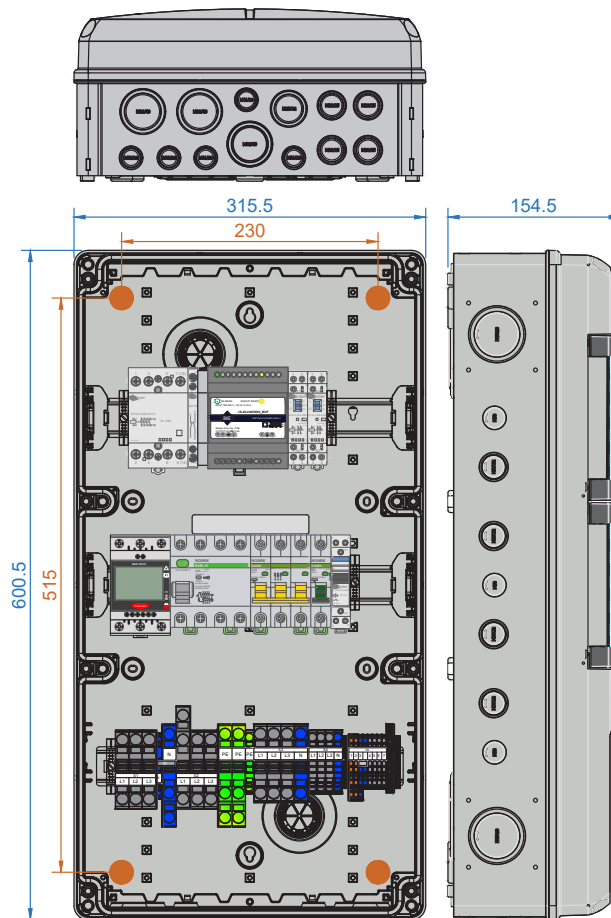

All values in [mm]

Dimensions
Fastening points „blue“ „orange“

Minimum distances


Top	200
bottom	400
lateral	200
front	1.200

SCOPE OF DELIVERY


Quantity	Designation
1	Switchover Box 10017349
3	Cable gland M40x1,5
4	Cable gland M32x1,5
2	Cable gland M20x1,5
3	Locknut M40
4	Locknut M32
2	Locknut M20

Quantity	Designation
1 set	Cover caps for fastening screws
1 set	Protective cover for Fronius Smart Meter
1	Warning label „dangerous voltage“
1	Fronius label „Backup power“
1	Operating instructions Fronius Smart Meter
1	Installation instructions


INTERCONNECTION ENVIRONMENT - SYMO GEN24 PLUS

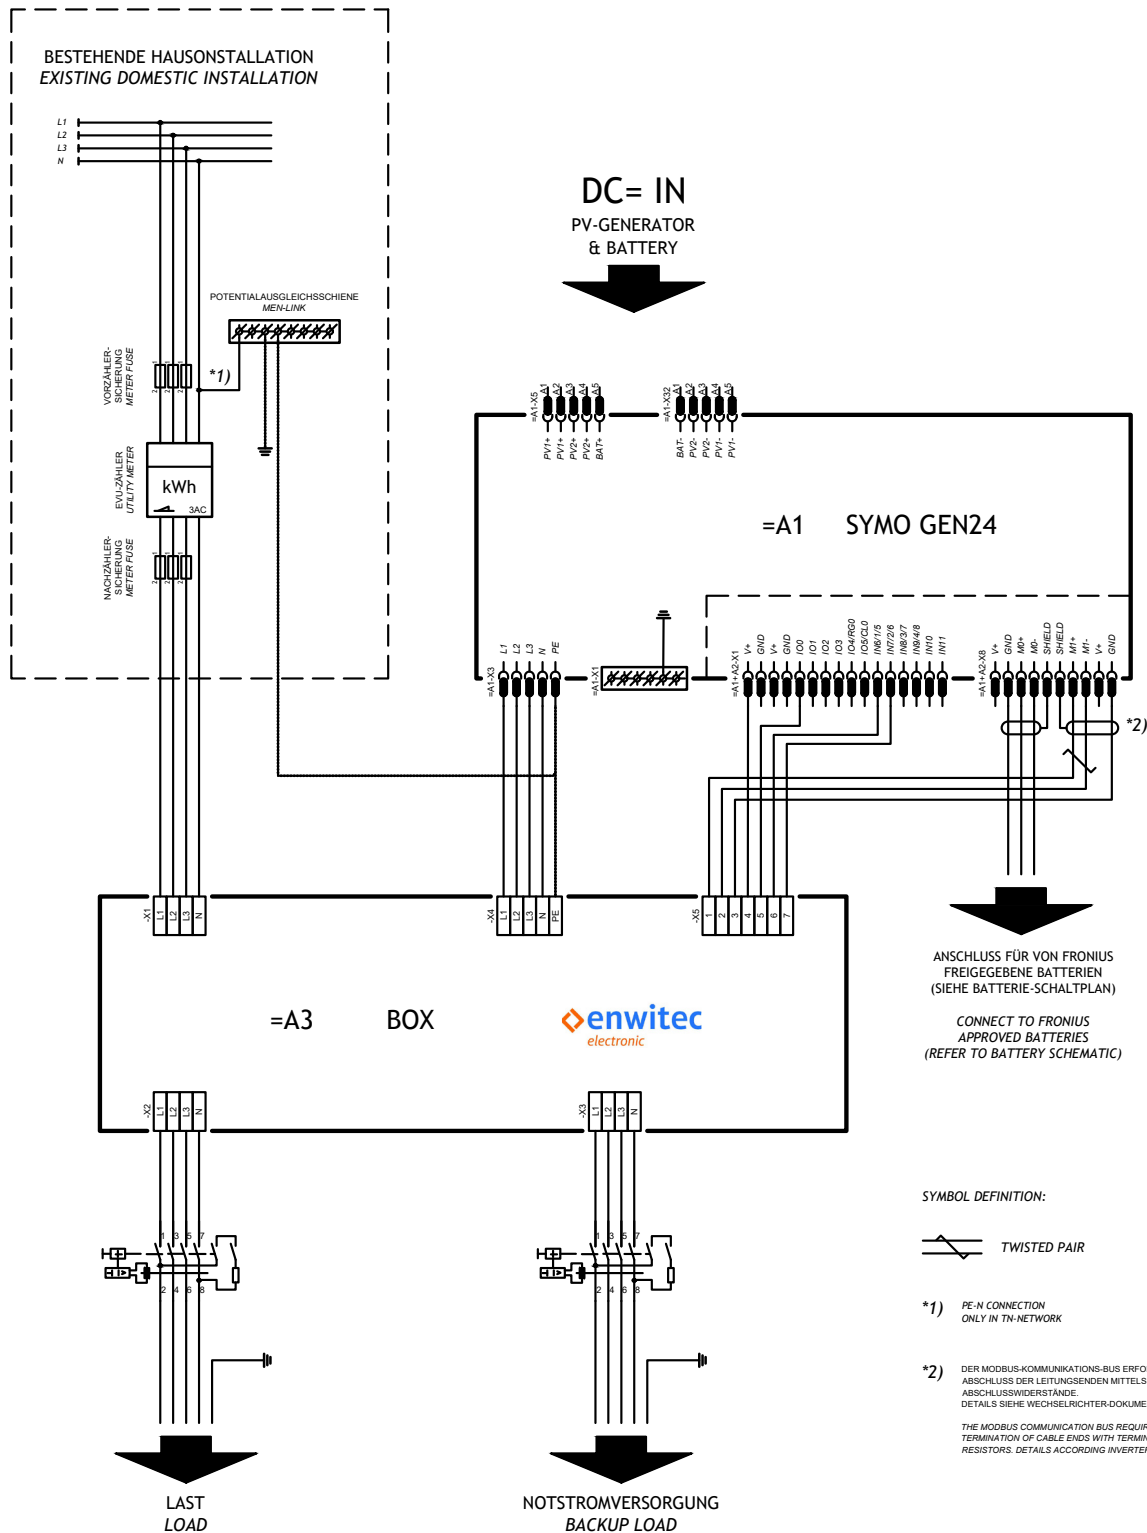

INTERNAL CIRCUITRY

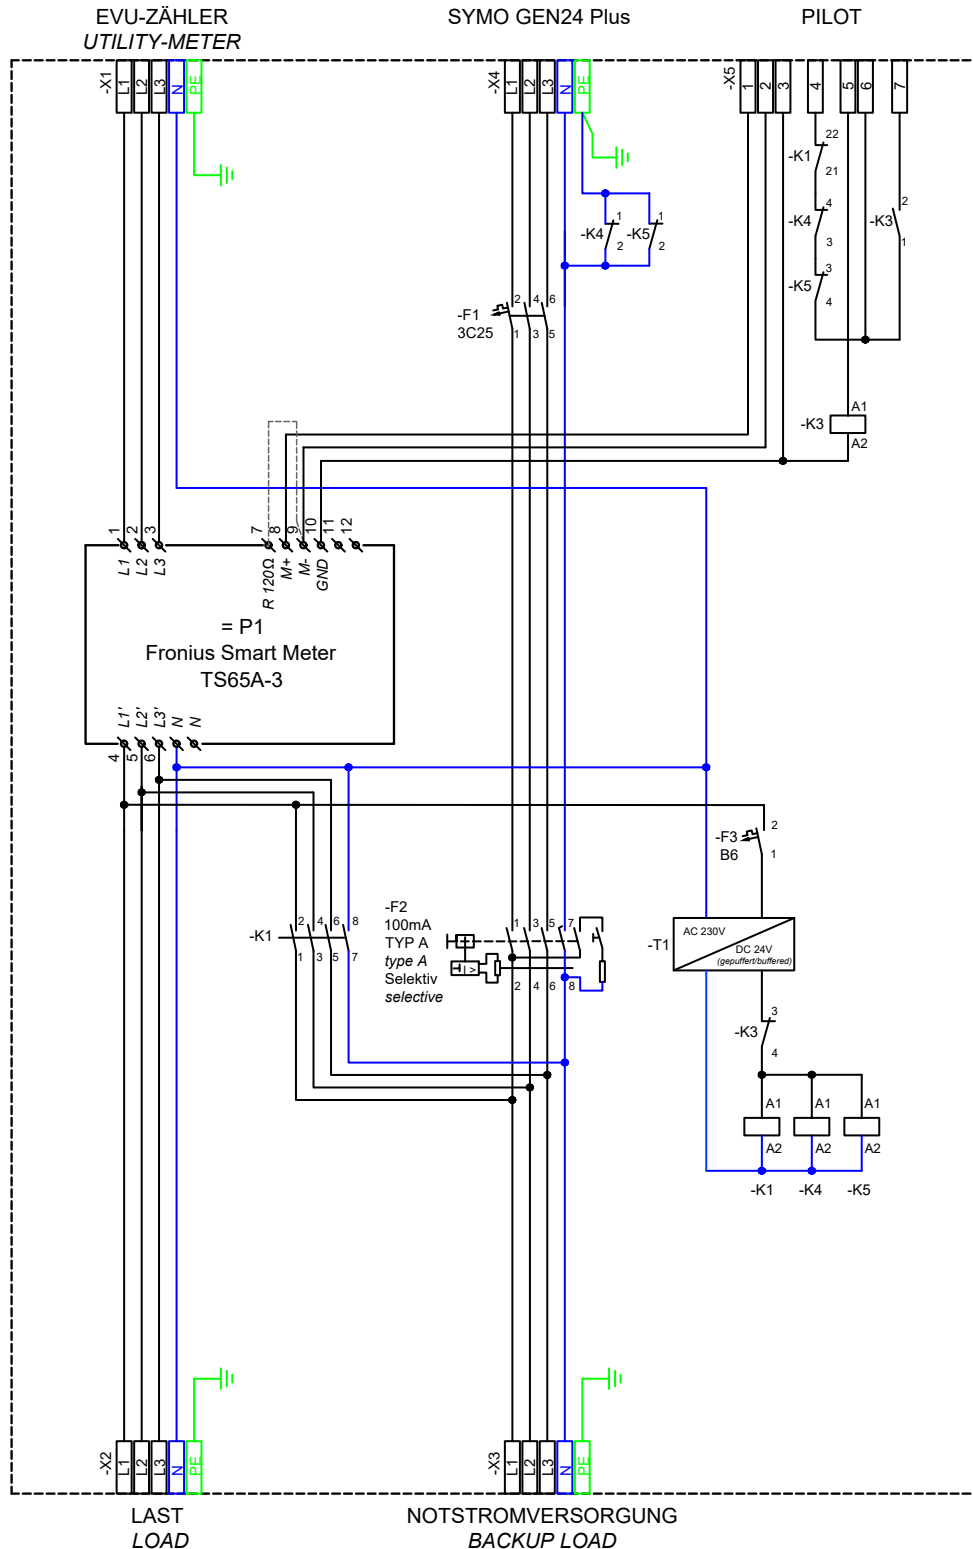

CABLE ENTRY AND CONNECTION

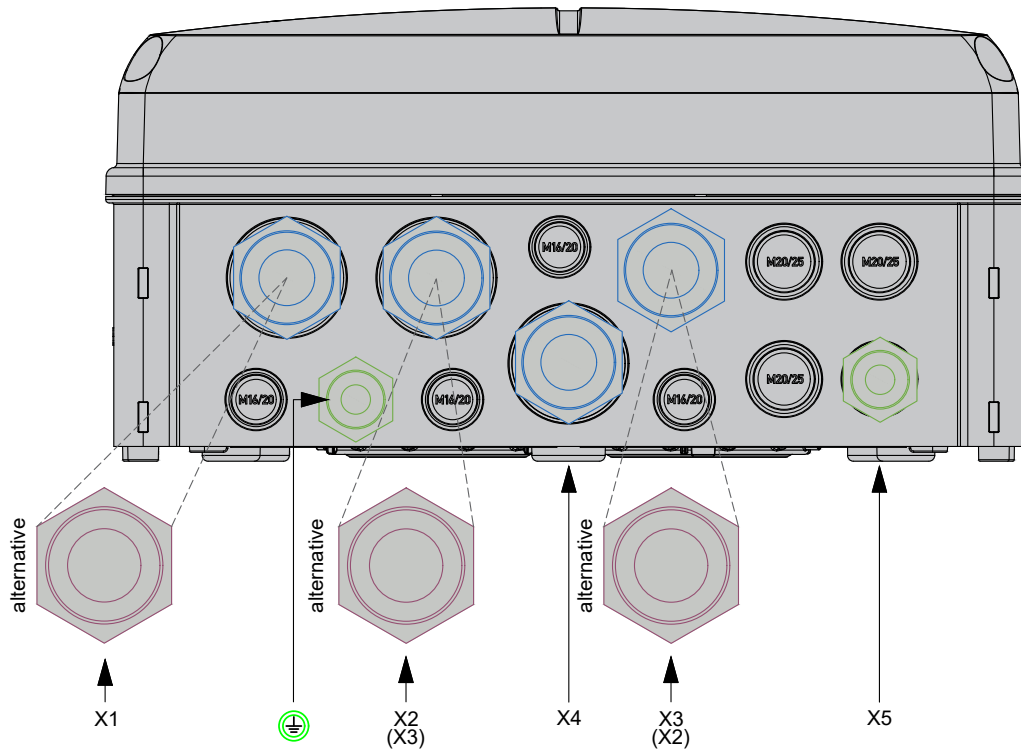

Cable gland	Terminal block	Clamping range ca. [mm]	Type of litz wire	max. cross section [mm ²]	Stripping length [mm]
M32 M40	X1 – Grid	19 - 25 16 - 28	solid /stranded fine stranded fine stranded + wire end ferrule	16 25 16	18 - 20
M32 M40	X2 – Load „Standard“	19 - 25 16 - 28	solid /stranded fine stranded fine stranded + wire end ferrule	16 25 16	18 - 20
M32 M40	X3 – Load „Backup“	19 - 25 16 - 28	solid /stranded fine stranded fine stranded + wire end ferrule	16 25 16	18 - 20
M32	X4 – Symo GEN24 Plus	19 - 25	solid /stranded fine stranded fine stranded + wire end ferrule	10 10 6	13 - 15
M20	X5 – Data cable	6 - 13	solid /stranded fine stranded fine stranded + wire end ferrule	2,5 2,5 1,5	10 - 12
M20	PE – equipotential bonding rail	6 - 13	solid /stranded fine stranded fine stranded + wire end ferrule	16 25 16	18 - 20

DATA SHEET

Switchover Box - Fronius SYMO GEN24 Plus - „Full Backup“

3PH_FRO_BBDAP_20KW_3PH_FRT

Art.Nr. 10017349

TECHNICAL DATA

• applicable / - not applicable

NOMINAL VALUES

Rated voltage	[V]	3PH - 230/400
Rated insulation voltage	[V]	400
Operating frequency	[Hz]	50 / 60 ±5%
Max. prospective* short circuit current	[kA]	10
Permitted grid structure		TT ⁺⁺ / TN-S
Grid disconnection		all-pole
Max. grid-side pickup fuse (gL/gG)	[A]	63
Max. thermal throughput power	$t_a = 40^\circ\text{C}$ $t_a = 25^\circ\text{C}$ [kW]	20 30 [#]
Standby-lost, ca.	[W]	10

CIRCUIT BREAKERS AND RESIDUAL CURRENT CIRCUIT BREAKERS

F1	Symo GEN24 Plus	MCB [A]	3C25
F2	Symo GEN24 Plus	RCD [A]	type A - selective 63/0,1
F3	Power supply T1	MCB [A]	B6

CONTACTORS (IEC/EN 61095; IEC/EN60947-1; IEC 60947-5-1)

K1	Grid disconnection	AC1 [A]	63
K4/K5	Earthing device	AC1 [A]	25
K3	Communication	AC1 [A]	20
K1/K4/K5	Control voltage	[VDC]	24
K3	Control voltage	[VDC]	12
Hum-free		•/-	•

ENERGY METER

Manufacturer	Fronius
Type	TS65A-3

FRT (FAULT RIDE THROUGH) SUPPORT

Buffered power supply	[VDC]	24
-----------------------	-------	----

GENERAL DATA

Dimensions WxHxD VAR1 (without cable glands)	[mm]	315x600x155
Weight, ca.	[kg]	11
Operation temperature range t_a	[°C]	-5 ... +40
Temperatur-transport/storage (24 h. 70°C)	[°C]	-25 ... +55
Humidity – condensing allowed	•/-	-
Humidity – permitted range	[%]	5...95
Max. altitude above sea level	[m]	2000
Protection class IP (EN 60529)	$t_a = 40^\circ\text{C}$ $t_a = 25^\circ\text{C}$ IP	65 44 [#]
Outdoor suitability (protected area)	•/-	-
Installation type		Indoor
Protection against electric shock (EN 61140)		II
Enclosure material		Polycarbonate
RoHS-conformity (2011/65/EU)	•/-	•
Colour of enclosure		similar RAL7035
Cover		transparent
Mounting method		wall mounting
Locking system		tool-free

MISCELLANEOUS

Customs tariff number	85371098
-----------------------	----------

ACCESSORY (not included in scope of delivery)

[#] Set of ventilation valves – order number	10017652 (enwitec)
Consisting of:	
2 x Ventilation valve – order number	036579 (LeGrand)
2 x Reduction adaptor	M40/M32
2 x Locknut	M40

* Is the maximum, unaffected continuous short-circuit current of the mains connection.

[#] When operating the switchover box with 30KW max. thermal throughput power, the use of 2 x ventilation valves is required (diagonal air flow – positioning bottom left and top right e.g.; knockouts are available)
Protection class is being reduced to IP44.

⁺⁺Only in consultation with grid operator!



enwitec electronic GmbH & Co.KG

Scherrwies 2 | 84329 Wurmansquick | Tel. +49 8725 9664-0

Mail info@enwitec.eu | www.enwitec.eu

Text and illustrations correspond to the technical status at the time of printing, subject to change without notice. Despite careful editing, all information is without guarantee. Liability is excluded.
©enwitec electronic GmbH & Co. KG

Release: 21st of June 2023

10017349_DataSheet_23_06_21

DATA SHEET

Switchover Box - Fronius SYMO GEN24 Plus - „Full Backup“

3PH_FRO_BBDAP_20KW_3PH_FRT

Art.Nr. 10017349

EC DECLARATION OF CONFORMITY

The product,	designation:	3PH_FRO_BBDAP_20KW_3PH_FRT
	article number:	10017349
	manufacturer:	enwitec electronic GmbH & Co. KG Scherrwies 2 84329 Rogglfing
	description:	Switchover Box for Fronius system Symo GEN24 Plus - „Full Backup“

to which this declaration relates, is in conformity to the following standards or normative documents:

EN 61439-1	Low-voltage switchgear and controlgear assemblies
EN 61439-2	Power switchgear and controlgear assemblies
EN 61439-3	Distribution boards intended to be operated by Ordinary persons (DBO)

and is in accordance with the provisions of the following EC-directives:

Low-voltage directive 2014/35/EU
Restrictions of Hazardous Substances Directive 2011/65/EU (RoHS)

Year of affixing CE-marking 2023

Date of issue: 21.06.2023

enwitec electronic GmbH & Co. KG



Name / Signature

Johann Wimmer
CEO